



VHM-Viertelrund-Profilfräser

G6X-beschichtet, geradegenutet, rechtsschneidend

*Solid carbide form end mill
G6X-coated, straight groove, right hand cut*

*Frese frontali in metallo duro
rivestimento G6X, scanalatura diritta, taglio destro*



Qualitätsmanagement nach ISO 9001:2000
Quality management system in accordance
with the ISO 9001:2000 standard



Schiedlberger Straße 10
A 4522 Sierning
T +43 (0) 72 59 / 23 47-0
F +43 (0) 72 59 / 31 62
office@rabensteiner.com
www.rabensteiner.com


RABENSTEINER
PRÄZISIONSWERKZEUGE

VHM-Viertelrund-Profilfräser

G6X-beschichtet, geradegenutet, rechtsschneidend


Solid carbide form end mill
G6X-coated, straight groove, right hand cut

Frese frontali in metallo duro
rivestimento G6X, scanalatura diritta, taglio destro

4120 Best.Nr. order no. codice



VHM Submicron	G6X		0°λ	EM 		Grauguss Cast iron Ghisa	Stahl Steel Acciaio
HRc ≤60			Z4			Stahl legiert Alloy steel Acciaio legato	Stahlguss Cast steel Acciaio ad alta resistenza
						AL/SI AL/SI AL/SI	

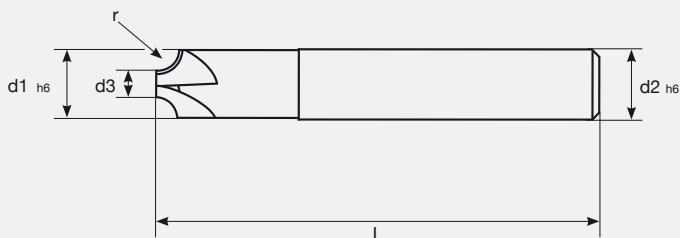

Bei der Bestellung bitte Bestellnummer angeben: Best.Nr. z.B. für $\varnothing 10 / r = 3,0 \times L 72\text{mm} = 4120-0300$
Please indicate order number for $\varnothing 10 / r = 3,0 \times L 72\text{mm} = 4120-0300$
Preghiamo d'indicare il numero d'ordine - $\varnothing 10 / r = 3,0 \times L 72\text{mm} = 4120-0300$

Abmessungen Dimensions Dimensioni

Bestellnummer order no. codice	r mm	∅ d3 - h6 mm	∅ d2 - h6 mm	∅ d1 - h6 mm	L mm	z
4120-0050	0,50	9,0	10	10	72	4
4120-0060	0,60	8,8	10	10	72	4
4120-0070	0,70	8,6	10	10	72	4
4120-0100	1,00	8,0	10	10	72	4
4120-0125	1,25	7,5	10	10	72	4
4120-0150	1,50	7,0	10	10	72	4
4120-0175	1,75	6,5	10	10	72	4
4120-0200	2,00	6,0	10	10	72	4
4120-0225	2,25	5,5	10	10	72	4
4120-0250	2,50	5,0	10	10	72	4
4120-0275	2,75	4,5	10	10	72	4
4120-0300	3,00	4,0	10	10	72	4
4120-0350	3,50	5,0	12	12	74	4
4120-0400	4,00	4,0	12	12	74	4
4120-0450	4,50	7,0	16	16	75	4
4120-0500	5,00	6,0	16	16	75	4
4120-0600	6,00	8,0	20	20	80	4
4120-0700	7,00	8,0	20	20	80	4
4120-0800	8,00	9,0	25	25	80	4
4120-0900	9,00	7,0	25	25	80	4
4120-1000	10,00	8,0	28	25	100	4

Zwischenabmessungen können auf Wunsch kurzfristig geliefert werden
Upon request intermediate dimensions can be supplied at short notice
Dimensioni intermedie possono essere fornite a richiesta a breve termine